


YURI

75Ω RF DISTRIBUTION COAXIAL CABLE

Website: www.yuricable.com

Email: sales@yuricable.com

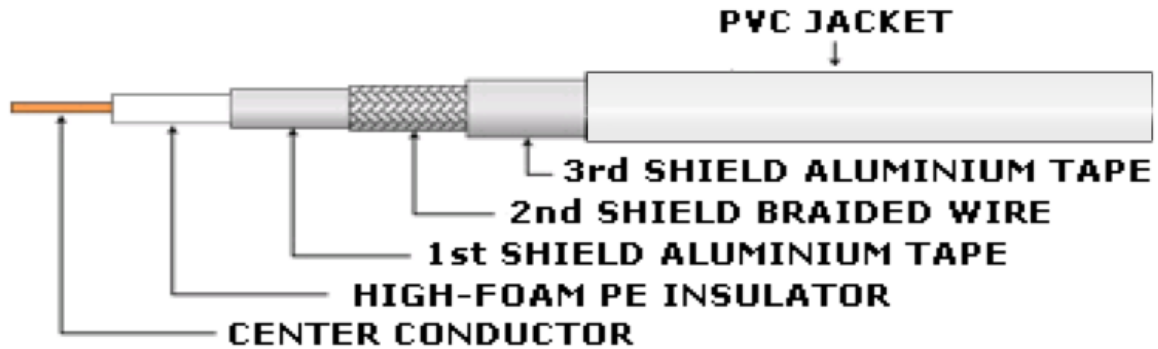

FEATURES :

TRI-SHIELD STRUCTURE	HIGH SCREENING FACTOR – ANTI INTERFERENCE
HIGH FOAM DIELECTRIC	LOW ATTENUATION, GOOD FOR HIGH FREQUENCY
LOW DENSITY PVC	HIGH HEAT RESISTANCE – GOOD FOR OUTDOOR USE
PVC w/UVA	HIGH UV RESISTANCE – GOOD FOR OUTDOOR USE
USAGE	RF DISTRIBUTION : CCTV, TERRESTRIAL TV, CATV, SAT TV
FREQUENCY	~ 3GHz
IMPEDANCE	75 Ω
EACH METER LENGTH MARKED ON THE CABLE	
COMPILED WITH STANDARD SIZE & SPEC	
MADE FOR OUTDOOR & INDDOR USE	

MODEL NUMBER:

RG-6/U-31SS60-U60LG	60°C, PVC : DENSITY/1.47, COLOR/LIGHT GREY
RG6-T1SS60-U75LG	75°C, PVC : DENSITY/1.40, COLOR/LIGHT GREY

[Website: www.yuricable.com](http://www.yuricable.com) | [Email:sales@yuricable.com](mailto:sales@yuricable.com)